




ANGLED SOCKET WRENCHES

ANGLED SOCKET WRENCHES 6-POINT X 6-POINT - METRIC

- ISO 691 - ISO 2236
- The specific angle offers increased torque application.
- The opening allows a threaded rod to be passed through for nuts on a long thread and also enables the use of a bar to increase torque application.
- The deep punch in the heads allows for tightening even when the threaded rod protrudes.
- Forged in Chrome Vanadium steel.
- High chrome finish.

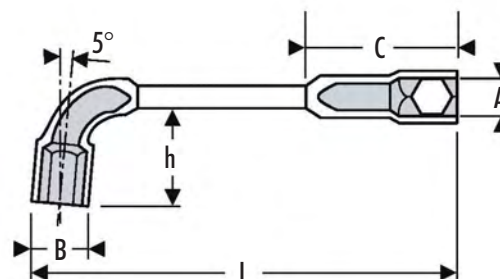

	A (mm)	L (mm)	B (mm)	C (mm)	h (mm)	Weight (g)	☒	EAN
E113393	6	102	10	21	15	35	1	3258951133934
E113394	7	106	11	22	17	45	1	3258951133941
E113395	8	114	12,50	25	19	60	1	3258951133958
E113396	9	122	13,50	26	20	75	1	3258951133965
E113397	10	129	15	28	24	85	1	3258951133972
E113398	11	136	16,50	30	25	115	1	3258951133989
E113399	12	144	18	36	28	145	1	3258951133996
E113400	13	152	19,50	38	30	170	1	3258951134009
E113401	14	160	21	40	32	200	1	3258951134016
E113402	15	169	22,50	42	34	230	1	3258951134023
E113403	16	178	24	46	37	290	1	3258951134030
E113404	17	187	25,50	48	39	310	1	3258951134047
E113405	18	195	26,50	50	40	325	1	3258951134054
E113406	19	204	28,50	51	41	420	1	3258951134061
E113407	20	212	29,50	53	43	440	1	3258951134078
E113408	21	221	30,50	55	46	490	1	3258951134085
E113409	22	230	32	57	48	530	1	3258951134092
E113410	23	240	33,50	64	51	650	1	3258951134108
E113411	24	250	34,50	67	54	660	1	3258951134115
E113451	25	260	36	69	56	845	1	3258951134511
E113412	26	270	37	70	57	985	1	3258951134122
E113413	27	280	38,50	73	58	1215	1	3258951134139
E113452	28	290	39,50	75	60	840	1	3258951134528
E113453	29	300	41	76	62	1035	1	3258951134535
E113414	30	310	42	83	64	1085	1	3258951134146
E113454	31	320	43,50	86	70	1352	1	3258951134542
E113415	32	330	44,50	88	74	1450	1	3258951134153
E113455	34	350	47,50	95	80	1550	1	3258951134559
E113456	35	360	48,50	96	81	1643	1	3258951134566
E113457	36	370	49,50	97	81	1758	1	3258951134573

